


Windshield Wiper System Questionnaire Form

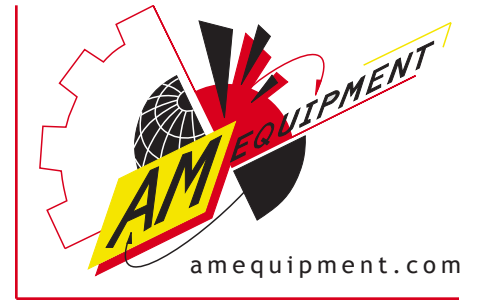

This form will allow our team of engineers to provide you with the best configuration of our systems for your application. Please fill out the form as detailed and accurately as possible, so that we may ensure the best results when using our products.

Company Name _____ Email _____
 Contact Name _____ Address _____
 Project Name _____ City, State _____
 Phone _____ Zip Code _____
 Fax _____ Country _____

What CAD system do you use? _____

*AME uses AutoDesk Inventor and can import/export files (please see attached document: 845-0018).

Please check all boxes that correspond to your application.

POWER SUPPLY

- 12 volt DC
- 24 volt DC
- Other _____

MOTOR LOCATION

- Above window
- Below window
- Driver's Side
- Passenger's Side

SWEEP PATTERN OPTIONS*

- Radial
- Pantograph

PARK OPTIONS

- Dynamic Park (Recommended)
- Coast to Park


SWITCH OPTIONS

- One switch
- Two switches
- One Motor
- Two Motors
- Washer feature
- Delay feature
- Smart Wheel™/Smart Stick™
- No switch required



WASHER SYSTEM

- Complete with reservoir
 - 2 Liter
 - 4 Liter
 - 10 Liter
- Without reservoir
- No system needed

*A radial sweep pattern is arced, uses one arm for each blade, and is more common on glass that is wider than it is tall.




*A pantograph sweep pattern is when the blade stays parallel to the side of the glass. This pattern is more common for glass that is taller and narrower and is achieved by using two linked arms attached to one blade.



WINDOW INFORMATION

Select your desired park position from the choices below. All illustrations are looking from the outside in. "Clockwise to Park" (CW) means the wiper arm travels in a clockwise direction to reach its park position. "Counterclockwise to Park" (CCW) means the wiper arm travels in a counterclockwise direction to reach its park position.

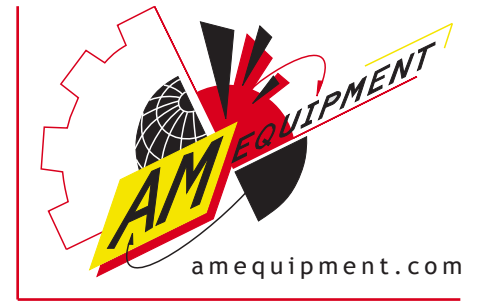

Select the park position for radial systems:

CCW to Park <input type="checkbox"/>		CW to Park <input type="checkbox"/>		CCW to Park <input type="checkbox"/>
		CW to Park <input type="checkbox"/>		
		CCW to Park <input type="checkbox"/>		
		CW to Park <input type="checkbox"/>		

Select the park position for pantograph systems:

CCW to Park <input type="checkbox"/>		CW to Park <input type="checkbox"/>

Please specify the dimensions of your glass according to the diagram below. Make all of the measurements looking from the outside in of the "daylight opening" (DLO), inside of the molding. The DLO is the area of glass that you can see after the windshield is installed and the molding is in place (the actual size of the glass before it is installed is bigger than the daylight opening dimensions of the glass and will affect the proper configuration of your wiper system).

Dimensions in: Inches Millimeters

Glass type: Curved Flat

A - Top width _____

B - Bottom width _____

C - Height _____

D - Distance from edge of DLO (inside of molding) to center of pivot shaft from:

Top edge _____



Bottom edge _____

Left edge _____


Right edge _____

E - Bulkhead thickness _____

F - Draw in the eye-level of the operator/desired sweep coverage with a dotted line.

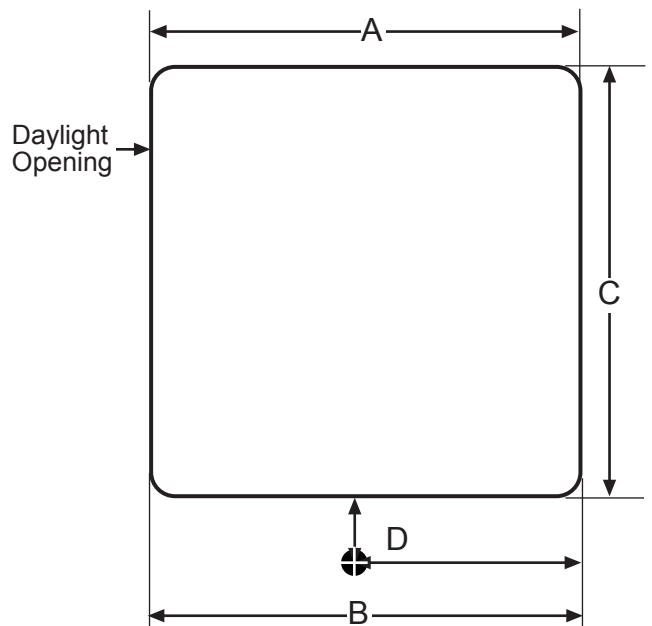

G - Draw in the breakaway curve with a solid line at the point where the blade should stop its sweep.



Comments: _____